



Joystick replacement for H1+

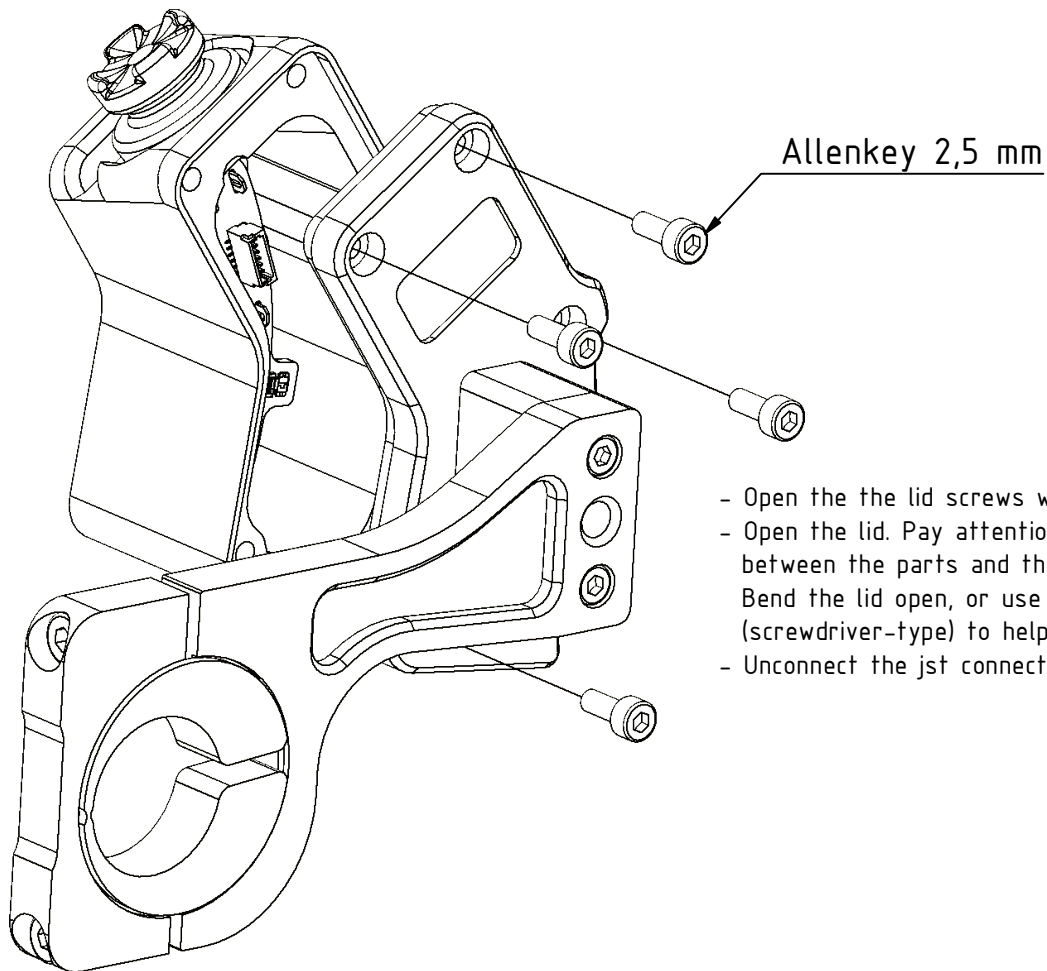

- remove the o-ring
- pull out the joystick rubber with the shaft
- unscrew Torx-T5 screws
- pull off the pcb board

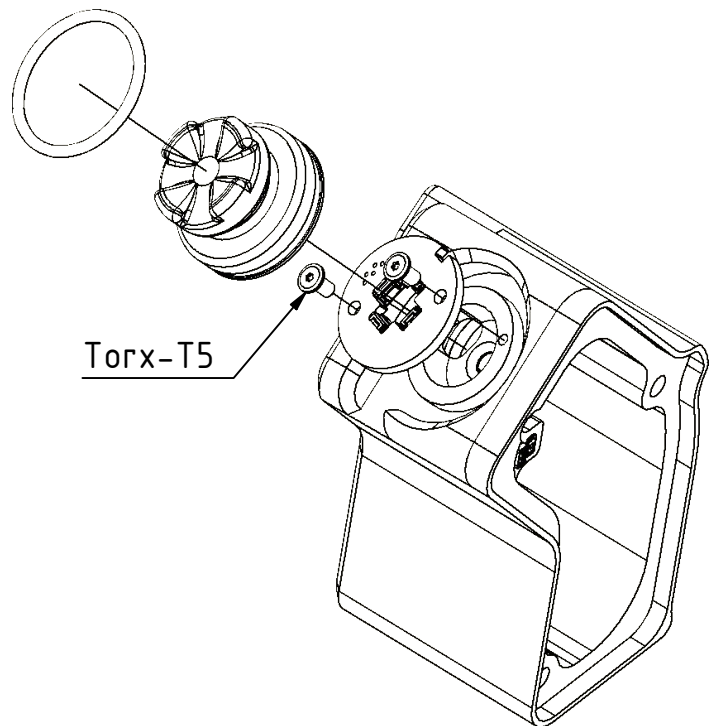

Assembly:

- assemble all back to the place in reverse order
- pay attention with the joystick rubber, there is a position point that aligns with the hole in pcb board (can be rotated to the place when rubber sits already on the pcb board)
- slide o-ring back to the slot (use dull, plastic, tool to press it into the groove).
- connect the jst cables, panning joystick to the connector labeled "J", buttons labeled "A"